MT3405AC

1uA Ultra-Low Quiescent Current, 1.3A Output Synchronous BUCK

FEATURES

- Ultra low Iq:1uA
- High Efficiency: Up to 96%
- 1.5MHz Constant Frequency Operation
- 1.3A Output Current
- No Schottky Diode Required
- 2.6V to 7V Input Voltage Range
- Low Dropout Operation:100% Duty Cycle
- PFM Mode for High Efficiency in Light Load
- Slope Compensated Current Mode Control for Excellent Line and Load Transient Response
- Short Circuit Protection
- Thermal Fault Protection
- Inrush Current Limit and Soft Start
- <1μA Shutdown Current
- SOT23-5 package

GENERAL DESCRIPTION

The MT3405AC is a constant frequency, current mode step-down converter. The device integrates a main switch and a synchronous rectifier for high efficiency without an external Schottky diode. It is ideal for powering portable equipment that runs from a single cell Lithium-Ion (Li+) battery. The output voltage can be regulated as low as 1.13V. This device offers two operation modes, PWM control and PFM Mode switching control, which allows a high efficiency over the wider range of the load.

The MT3405AC is offered in a low profile 5-pin, SOT package, and is available in an adjustable version.

APPLICATIONS

- Wearable
- IOT
- Energy Harvest
- Battery powered devices

TYPICAL APPLICATION


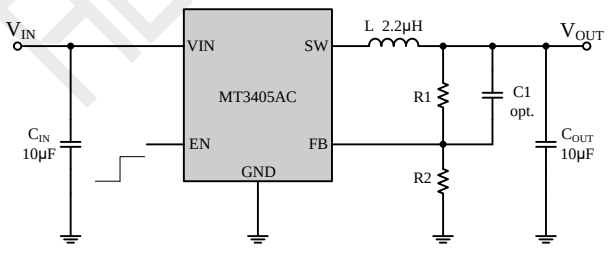


Figure 1. Basic Application Circuit

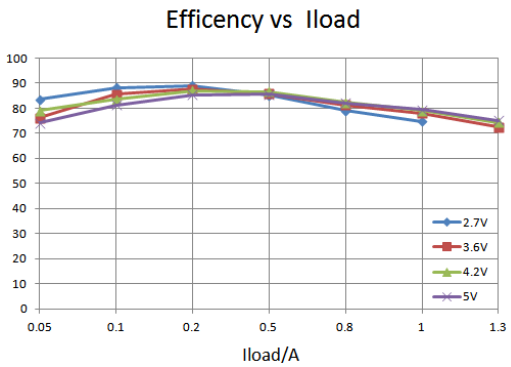

AEROSEMI CONFIDENTIAL

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

ABSOLUTE MAXIMUM RATINGS (Note 1)

Input Supply Voltage……..…-0.3V to 7V
EN,FB Voltages…….-0.3V to (V_{IN}+0.3V)
SW Voltage……...-0.3V to (V_{IN}+0.3V)
Power Dissipation……...0.4W
Thermal Resistance θ_{JC}……..130°C/W
Thermal Resistance θ_{JA}……..250°C/W
Junction Temperature(Note2)…….150°C
Operating Temperature Range…….-40°C to 85°C
Lead Temperature(Soldering,10s)……...300°C
Storage Temperature Range……..-65°C to 150°C
ESD HBM(Human Body Mode)……...2kV
ESD MM(Machine Mode)…….200V

PACKAGE/ORDER INFORMATION

	Order Part Number	Package	Top Marking
TOP VIEW EN 1 GND 2 SW 3 5 FB 4 VIN 5-LEAD PLASTIC SOT-23 T_{JMAX} = 150°C, θ_{JA} = 250°C/ W, θ_{JC} = 130°C/W	MT3405AC	SOT23-5	A01FDC

F:Version, D:Year, C:Week

PIN DESCRIPTION

Pin Name	Pin Number	Description
EN	1	Chip Enable Pin. Drive EN above 1.5V to turn on the part. Drive EN below 0.3V to turn it off. Do not leave EN floating.
GND	2	Analog ground pin.
SW	3	Power Switch Output. It is the switch node connection to Inductor. This pin connects to the drains of the internal P-ch and N-ch MOSFET switches.
VIN	4	Power Supply Input.Must be closely decoupled to GND with a 10μF or greater ceramic capacitor.
FB	5	Output Voltage Feedback Pin. An internal resistive divider divides the output voltage down for comparison to the internal reference voltage.

AEROSEMI CONFIDENTIAL

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

ELECTRICAL CHARACTERISTICS (Note 3)

(V_{IN}=V_{EN}=5V,T_A = 25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage Range		2.6		7	V
Input UVLO			2.37		V
Input Supply Current	No Load, RFB_G =1Mohm		2.1		uA
Input Shutdown Current			0.1		uA
Regulated Feedback Voltage VFB		1.107	1.130	1.153	V
Load Regulation			0.4		%/A
Line Regulation	VIN =2.7 to 5.5V		0.1		%/V
Oscillation Frequency			1.5		MHz
On Resistance of PMOS	ISW=100mA		200		mΩ
On Resistance of NMOS	ISW=-100mA		300		mΩ
EN High-Level Input Voltage		1.5			V
EN Low-Level Input Voltage				0.4	V
VP	OVP		7		V
	OVP Hysteresis		0.3		V
OTP	Thermal shutdown threshold		155		°C
	Thermal shutdown hysteresis		20		°C

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.


Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: $T_J = T_A + (P_D)$ x (250°C/W).


Note 3: 100% production test at +25°C. Specifications over the temperature range are guaranteed by design and characterization.

Note 4: Dynamic supply current is higher due to the gate charge being delivered at the switching frequency.

TYPICAL PERFORMANCE CHARACTERISTICS


V_{IN}=V_{EN}=5V, V_{OUT}=1.2V

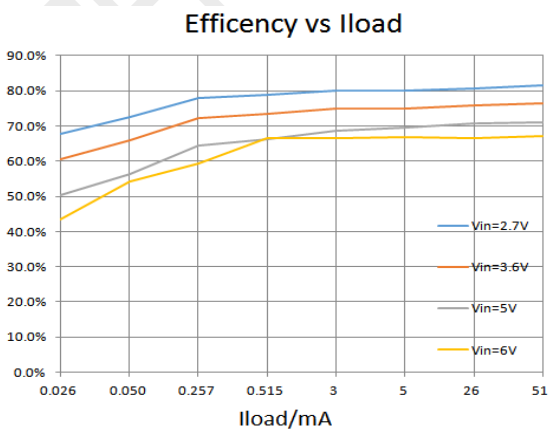

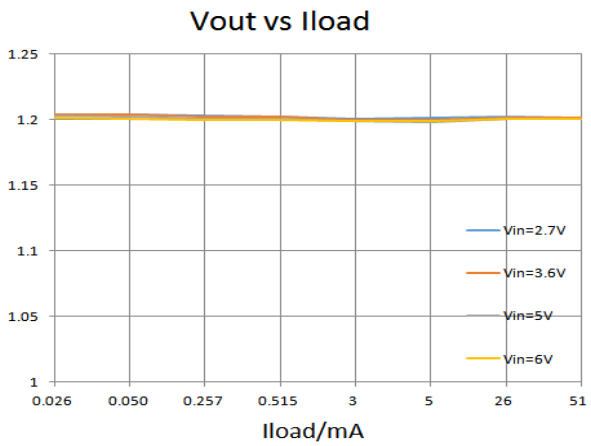


www.aerosemi.com
Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.


Efficency vs Iload

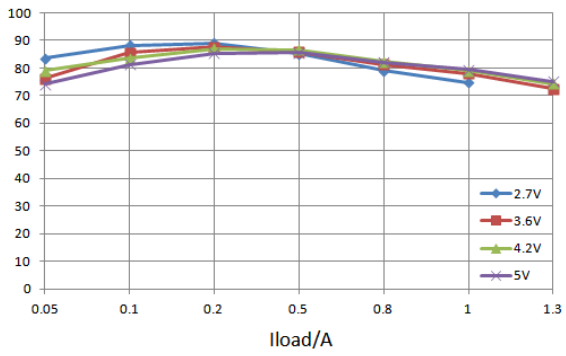


VOUT vs Iload

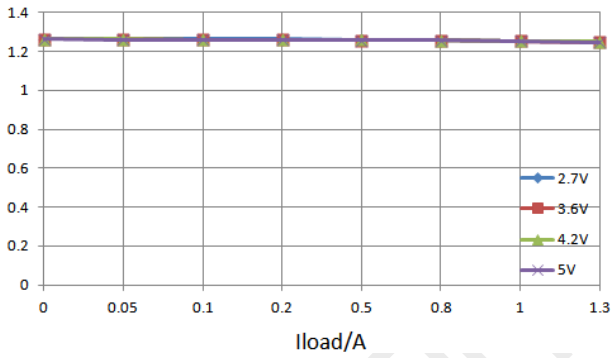


Vin=2.7V,Load=0.1A

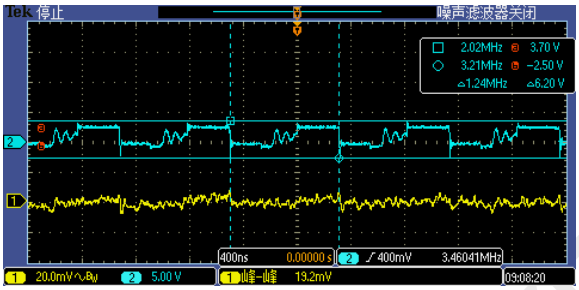


Vin=2.7V,Load=1A

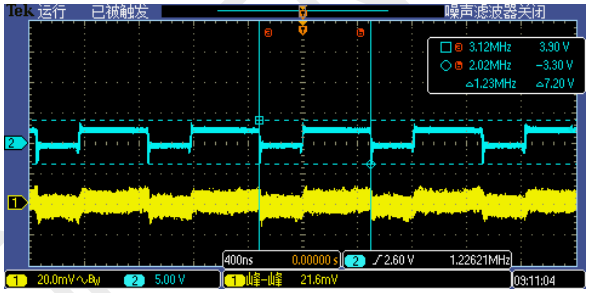


Vin=4.2V,Load=0.1A

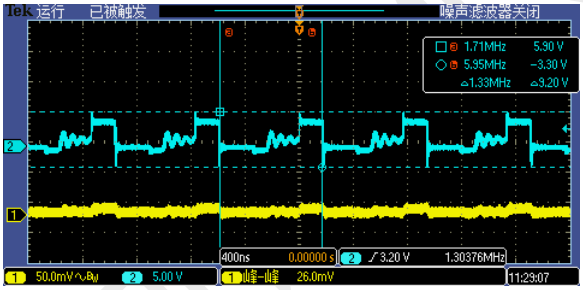


Vin=4.2V,Load=1.3A

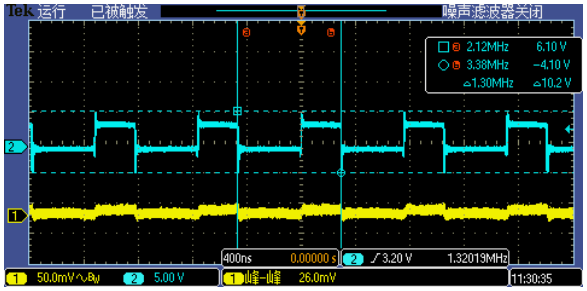

Vin=5V,Load=0.1A

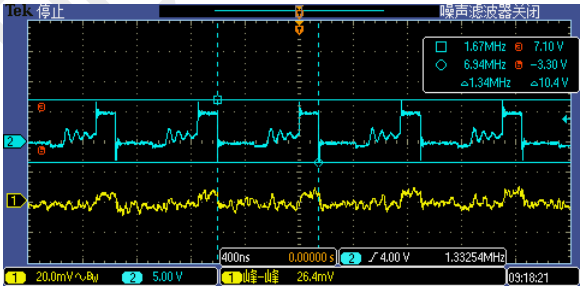

Vin=5V,Load=1.3A

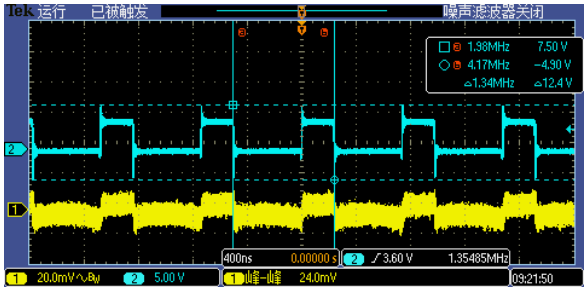

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

FUNCTIONAL BLOCK DIAGRAM

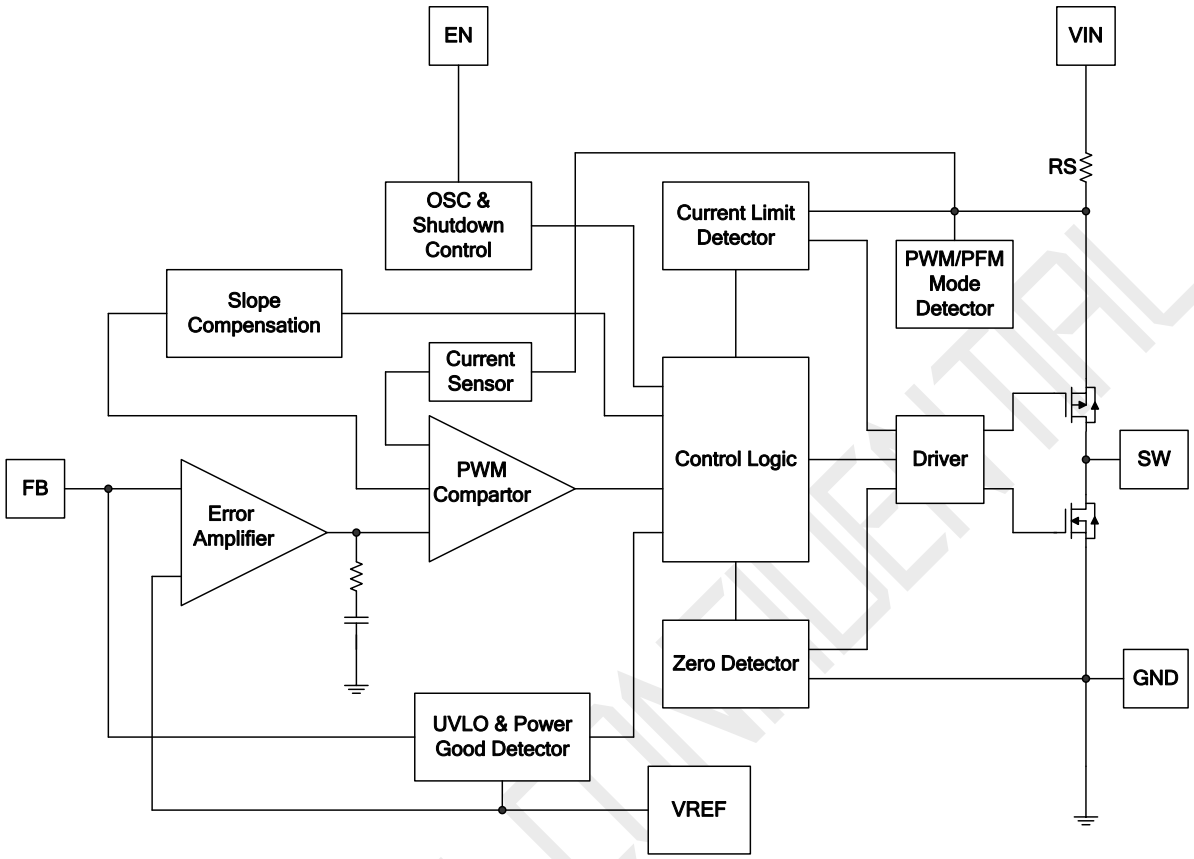


Figure 2. MT3405AC Block Diagram

FUNCTIONAL DESCRIPTION

The MT3405AC is a high performance, 1.3A, 1.5MHz monolithic step-down converter. The MT3405AC requires only three external power components (C_{IN}, C_{OUT} and L). The adjustable version can be programmed with external feedback to any voltage, ranging from 1.13V to the input voltage.

At dropout operation, the converter duty cycle increases to 100% and the output voltage tracks the input voltage minus the $R_{DS(ON)}$ drop of the high-side MOSFET.

The internal error amplifier and compensation provides excellent transient response, load, and line regulation. Soft start function prevents input inrush current and output overshoot during start up.

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

APPLICATIONS INFORMATION

Setting the Output Voltage

The internal reference V_{REF} is 1.13V (Typical).The output voltage is divided by a resistor, R1 and R2 to the FB pin. The output voltage is given by:

$$V_{OUT} = 1.13V \times \left(1 + \frac{R1}{R2}\right)$$

Inductor Selection

For most designs, the MT3405AC operates with inductors of 1μH to 4.7μH. Low inductance values are physically smaller but require faster switching, which results in some efficiency loss. The inductor value can be derived from the following equation:

$$L = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times f_{OSC}}$$

Where ΔI_L is inductor Ripple Current. Large value inductors result in lower ripple current and small value inductors result in high ripple current. For optimum voltage-positioning load transients, choose an inductor with DC series resistance in the 50mΩ to 150mΩ range.

Input Capacitor Selection

The input capacitor reduces the surge current drawn from the input and switching noise from the device. The input capacitor impedance at the switching frequency should be less than input source impedance to prevent high frequency switching current passing to the input. A low ESR input capacitor sized for maximum RMS current must be used. Ceramic capacitors with X5R or X7R dielectrics are highly recommended because of their low ESR and small temperature coefficients. A 10μF ceramic capacitor for most applications is sufficient. A large value may be used for improved input voltage filtering.

Output Capacitor Selection

The output capacitor is required to keep the output voltage ripple small and to ensure regulation loop stability. The output capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R dielectrics are recommended due to their low ESR and high ripple current ratings. The output ripple ΔV_{OUT} is determined by:

$$\Delta V_{OUT} \le \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times f_{OSC} \times L} \times \left(ESR + \frac{1}{8 \times f_{OSC} \times C_{OUT}}\right)$$

A 10μF ceramic can satisfy most applications.

PCB Layout Recommendations

When laying out the printed circuit board, the following checking should be used to ensure proper operation of the MT3405AC. Check the following in your layout:

- The power traces, consisting of the GND trace, the SW trace and the VIN trace should be kept short, direct and wide
- Does the (+) plates of C_{IN} connect to VIN as closely as possible. This capacitor provides the AC current to the internal power MOSFETs.
- Keep the switching node, SW, away from the sensitive V_{OUT} node.
- Keep the (-) plates of C_{IN} and C_{OUT} as close as possible

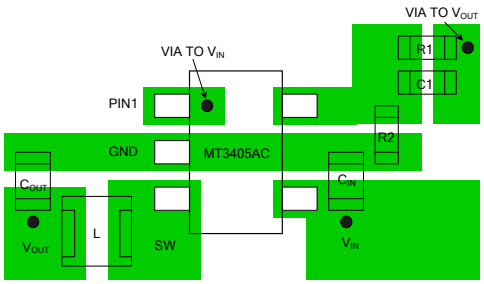



Figure 3. MT3405AC Suggested Layout

AEROSEMI CONFIDENTIAL


Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

PACKAGE DESCRIPTION


SOT23-5

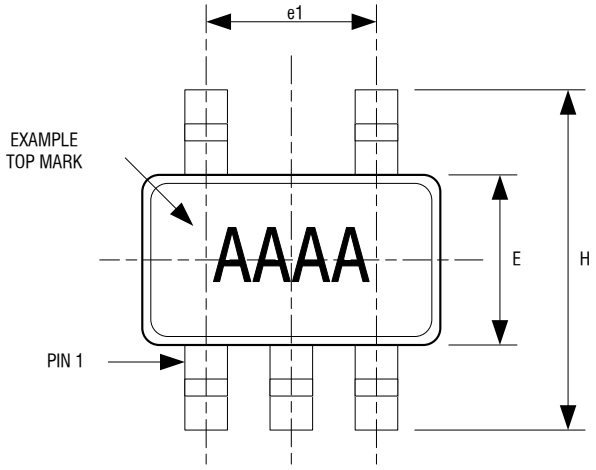

TOP VIEW

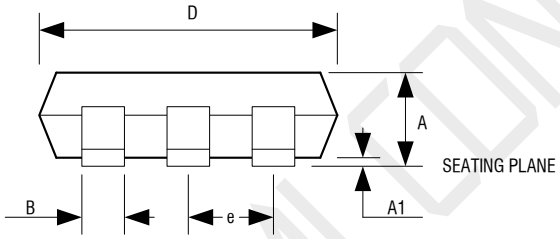

FRONT VIEW

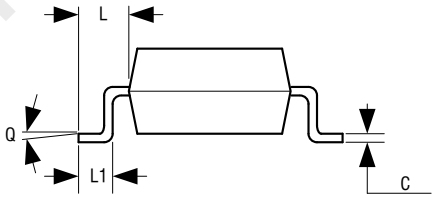

SIDE VIEW

5LD SOT-23 PACKAGE OUTLINE DIMENSIONS

Dimension	Min.	Max.
A	1.05	1.35
A1	0.04	0.15
B	0.3	0.5
C	0.09	0.2
D	2.8	3.0
H	2.5	3.1
E	1.5	1.7
e	0.95 REF.	
e1	1.90 REF.	
L1	0.2	0.55
L	0.35	0.8
Q	0°	10°

NOTE:
1.DIMENSIONS ARE IN MILLIMETERS
2.DRAWING NOT TO SCALE
3.DIMENSIONS ARE INCLUSIVE OF PLATING
4.DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR

AEROSEMI CONFIDENTIAL

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.

IMPORTANT NOTICE

Xi'an Aerosemi Technology Co.,Ltd reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services.

Xi'an Aerosemi Technology Co.,Ltd is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Xi'an Aerosemi Technology Co.,Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does Xi'an Aerosemi Technology Co.,Ltd assume any liability arising out of the application or use of any its products or circuits.

Copyright © 2011, Xi'an Aerosemi Technology Co.,Ltd

Tel: 0755-82879616 021-50871055 029-88868021

Http://www.aerosemi.com

E-Mail: sales@aerosemi.com

AEROSEMI CONFIDENTIAL

Aerosemi Proprietary Information.Unauthorized Photocopy and Duplication Prohibited.
All Rights Reserved.