CRXI10D065G2

Silicon Carbide Schottky Diode 650 V, 10 A, 28 nC

General Description

This product family is CRM's second generation SiC JBS, with lower VF and offers state of the art performance. It is designed for high frequency applications where high efficiency and high reliability are required. It is qualified and manufactured on the productive 6 inch SiC line in China fully owned by CR MICRO.

Product Summary

V_{RRM}	650 V
I_F (T_C=161℃)	10 A
Q_C	28 nC


Features

- Low conduction loss due to low V_F
- Extremely low switching loss by tiny Q_C
- Highly rugged due to better surge current
- Industrial standard quality and reliability


Applications

- Server
- Telecom
- High performance SMPS
- Power factor correction

TO-220-2



Equivalent circuit

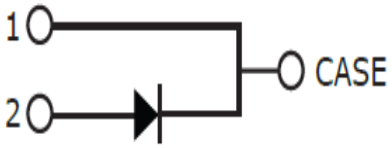

Package Marking and Ordering Information

Part #	Marking	Package
CRXI10D065G2	CRXI10D065G2	TO-220-2

Maximum Ratings (at Tc = 25 °C, unless otherwise specified)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	650	V
Surge Peak Reverse Voltage	V_{RSM}	650	V
DC Peak Reverse Voltage	V_R	650	V
Continuous Forward Current T_C = 25°C T_C = 135°C T_C = 161°C	I_F	 33 17 10	A
Repetitive Peak Forward Surge Current T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	I_{FRM}	 37 30	A
Non-Repetitive Forward Surge Current T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	I_{FSM}	 80 64	A
Non-Repetitive Forward Surge Current T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	$\int i^2dt$	 32 8	A^2s
Power dissipation T_C = 25°C T_C = 110°C	P_{tot}	 93 40	W
Operating junction Range	T_j	-55 to +175	°C
Storage temperature Range	T_{stg}	-55 to +150	°C

Thermal Resistance

Parameter	Symbol	Typ.	Unit
Thermal resistance, junction – case.	R_{thJC}	1.6	°C/W

Electrical Characteristic (at Tc = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Forward Voltage	V_F	- -	1.35 1.55	1.7 2	V	I_F=10A T_j=25°C T_j=175°C
Reverse Current	I_R	- -	2 50	50 -	μA	V_R=650V T_j=25°C T_j=175°C
Total Capacitive Charge	Q_C	-	28	-	nC	V_R=400V，T_j=25℃ $Q_C = \int_0^{V_R} C(V)dV$
Total Capacitance	C	- - -	560 56 44	- - -	pF	T_j=25℃, f=1MHz V_R=0V V_R=200V V_R=400V

Characteristics Curve:

Fig 1: Forward Characteristics

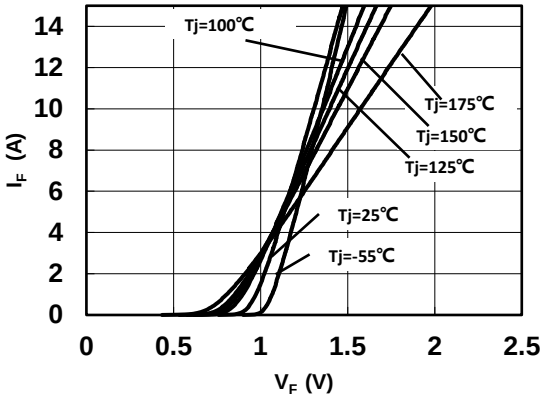


Fig 2: Reverse Characteristics

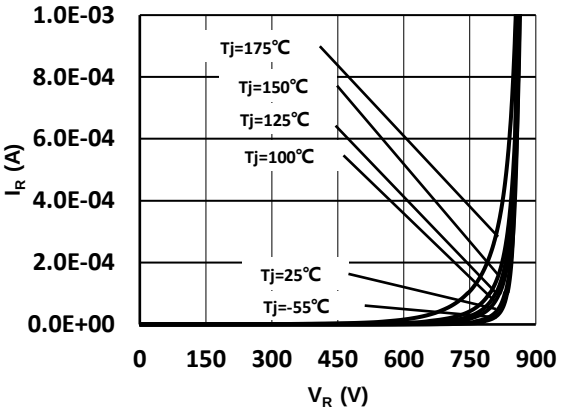


Fig 3: Current Derating

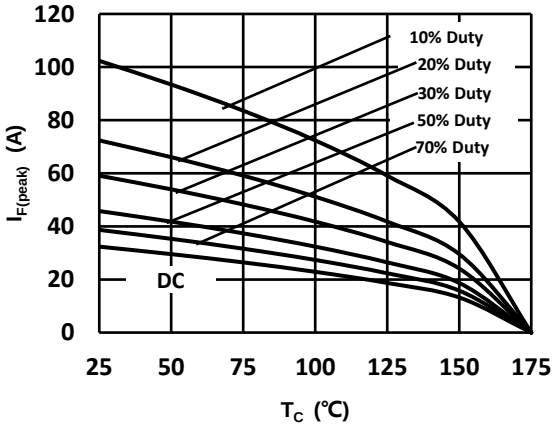


Fig 4: Power Derating

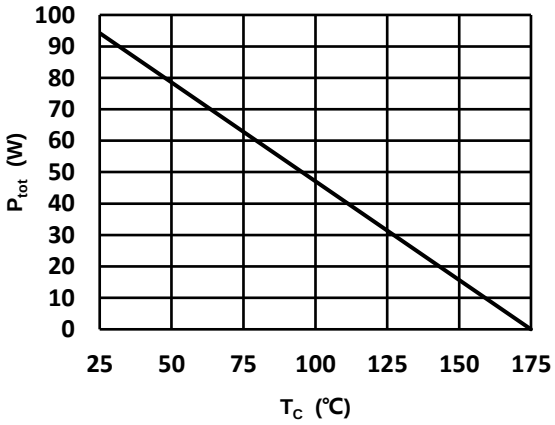


Fig 5: Capacitance vs. Reverse Voltage

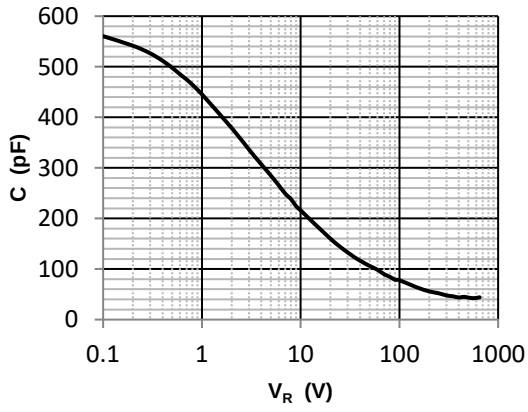


Fig 6: Reverse Charge vs. Reverse Voltage

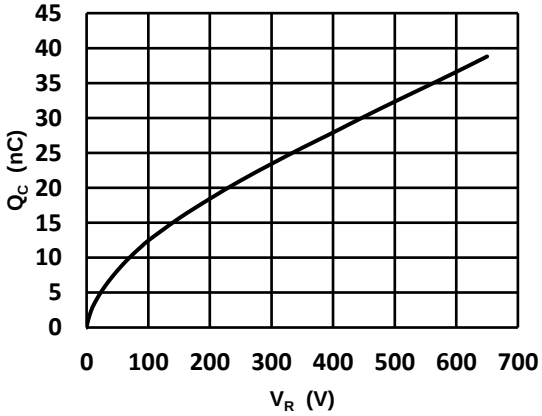


Fig 7: Typical Capacitance Stored Energy



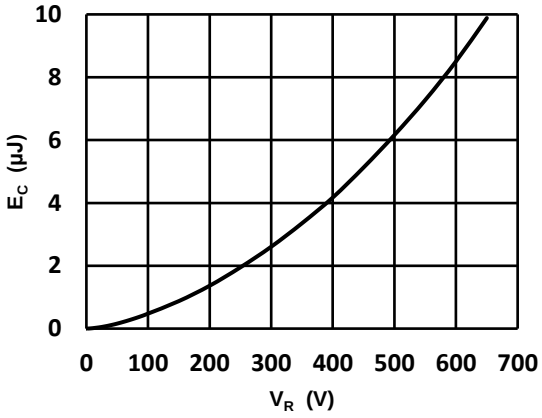


Fig 8: Transient Thermal Impedance

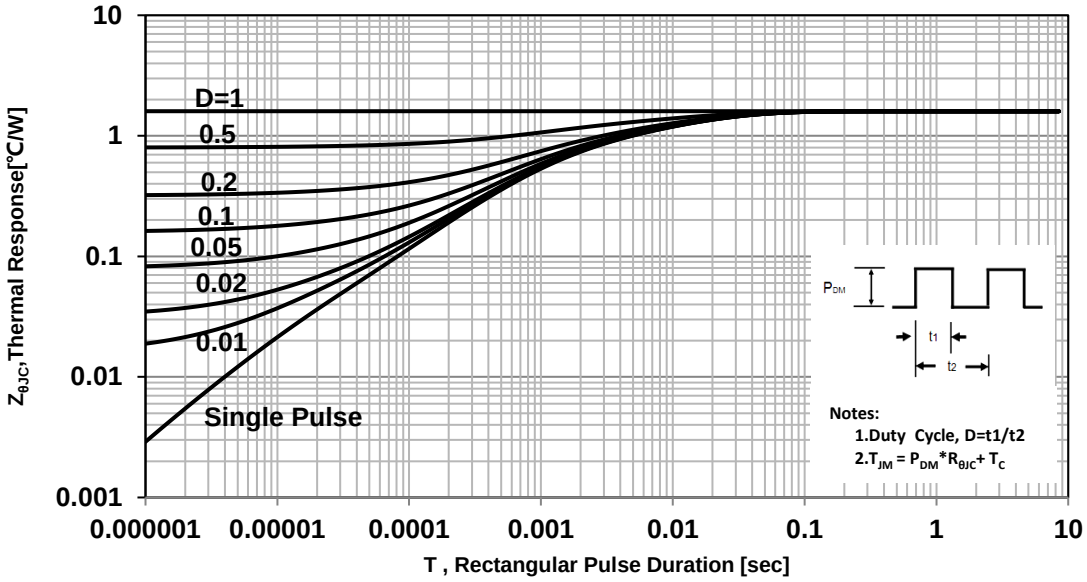

Package Outline: TO-220-2

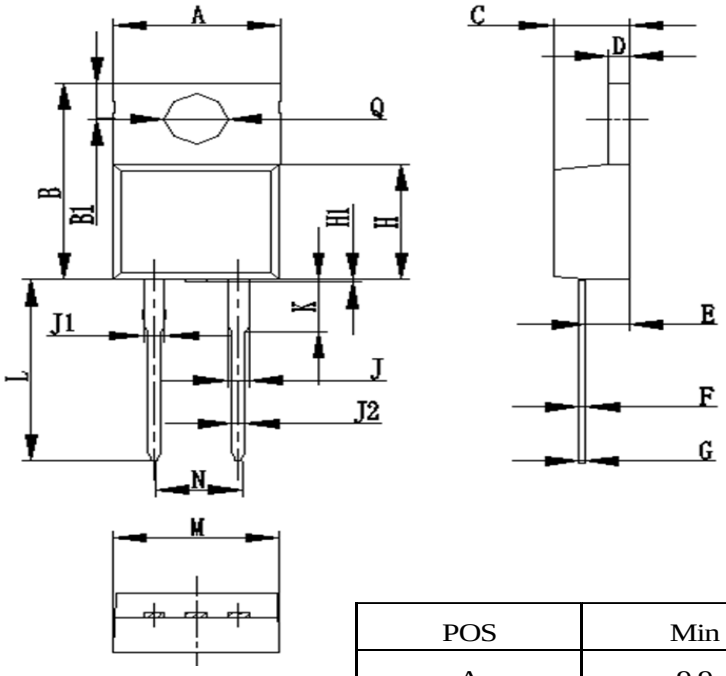

POS	Min	Typ	Max
A	9.9	10.12	10.32
B	15.4	15.6	15.8
B1	2.54	2.74	2.94
C	4.37	4.57	4.77
D	1.17	1.27	1.37
E	2.4	2.6	2.8
F	0.46	0.56	0.66
G	0.28	0.38	0.48
H	9	9.2	9.4
H1	0	0.25	0.5
J	1.19	1.35	1.45
J1	1.17	1.27	1.37
J2	0.71	0.81	0.91
K	2.5	2.9	3.3
L	12.5	13	13.5
M	9.9	10	10.1
N	4.84	5.08	5.28
Q	3.64	3.84	4.04

Revision History

Revison	Date	Major changes
1.0		Release of formal version.

Warnings

Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximun ratings of the device.

1. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
2. This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control systems.