华润微电子(重庆)有限公司

CRSD130N10L4Z

SkyMOS4 N-MOSFET 100V, 11.4mΩ, 50A

Features

- Uses CRM(CQ) advanced SkyMOS4 technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent Q_gx$R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria

Product Summary


V_{DS}	100V
$R_{DS(on).typ}$	11.4mΩ
I_D	50A

100% DVDS Tested
100% Avalanche Tested


Applications

- Synchronous Rectification for AC/DC Quick Charger
- Battery management System
- UPS (Uninterrupible Power Supplies)

TO-252

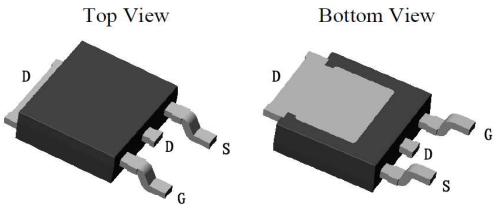

CRSD130N10L4Z



Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRSD130N10L4Z	CRSD130N10L4Z	TO-252	Tape&Reel	N/A	N/A	2500pcs

Absolute Maximum Ratings

Parameter	**Symbol**	**Value**	**Unit**
Drain-source voltage	V_{DS}	100	V
Continuous drain current T_C = 25°C (Silicon limit) T_C = 25°C (Package limit) T_C = 100°C (Silicon limit)	I_D	 50 80 30	A
Pulsed drain current (T_C = 25°C, t_p limited by T_{jmax})	$I_{D\ pulse}$	200	A
Avalanche energy, single pulse (I_D = 14A, Rg=25Ω)[1]	E_{AS}	49	mJ
Gate-Source voltage	V_{GS}	±20	V
Power dissipation (T_C = 25°C)	P_{tot}	57	W
Operating junction and storage temperature	T_j , T_{stg}	-55...+150	°C
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	Tsold	260	°C

※. Notes:
1.EAS is tested at starting Tj = 25℃, L = 0.5mH, IAS =14A, VGS = 10V.
2.Repetitive rating, pulse width limited by junction temperature TJ(MAX)=150°C. Ratings are based on low frequency and duty cycles to keep initial TJ =25°C.

©China Resources Microelectronics (Chongqing) Limited

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction – case.	R_{thJC}	2.21	°C/W
Thermal resistance, junction – ambient(min. footprint)	R_{thJA}	115	

Electrical Characteristic (at Tj = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Static Characteristic						
Drain-source breakdown voltage	BV_{DSS}	105	-	-	V	V_{GS}=0V, I_D=250μA
		105	-	-	V	V_{GS}=0V, I_D=1mA
Gate threshold voltage	$V_{GS(th)}$	1.5	2.0	2.5	V	V_{DS}=V_{GS},I_D=250μA
Zero gate voltage drain current	I_{DSS}	- -	- -	1 100	μA	V_{DS}=100V,V_{GS}=0V T_j=25°C T_j=125°C
Gate-source leakage current	I_{GSS}	0	-	±100	nA	V_{GS}=±20V,V_{DS}=0V
Drain-source on-state resistance	$R_{DS(on)}$	-	11.4	14.0	mΩ	VGS=10V, ID=25A
		-	15.3	18.4		VGS=4.5V, ID=25A
Transconductance	g_{fs}	-	54.0	108	S	V_{DS}=5V, I_D=25A
Dynamic Characteristic						
Input Capacitance	C_{iss}	526	1052	1578	pF	V_{GS}=0V, V_{DS}=50V, f=1MHz
Output Capacitance	C_{oss}	98	195	390		
Reverse Transfer Capacitance	C_{rss}	1	7.6	15.2		
Gate Total Charge	Q_G	9.4	18.7	28.05	nC	V_{GS}=10V, V_{DS}=50V, I_D=25A
Gate-Source charge	Q_{gs}	2.6	5.2	7.8		
Gate-Drain charge	Q_{gd}	1.75	3.5	7		
Turn-on delay time	$t_{d(on)}$	4	8.0	16	ns	V_{GS}=10V, V_{DD}=50V, R_{G_ext}=2.7Ω
Rise time	t_r	33	50.0	75		
Turn-off delay time	$t_{d(off)}$	14	21.0	31.5		
Fall time	t_f	49	73.4	110.1		
Gate resistance	R_G	0	2.30	11.5	Ω	V_{GS}=0V, V_{DS}=0V, f=1MHz

©China Resources Microelectronics (Chongqing) Limited

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	-	0.88	1.4	V	V_{GS}=0V,I_{SD}=25A
Body Diode Reverse Recovery Time	t_{rr}	35	70.0	140.0	ns	I_F=25A,dI/dt=100A/μs
Body Diode Reverse Recovery Charge	Q_{rr}	42	84.0	168.0	nC	

©China Resources Microelectronics (Chongqing) Limited

Typical Performance Characteristics

Fig 1: Output Characteristics

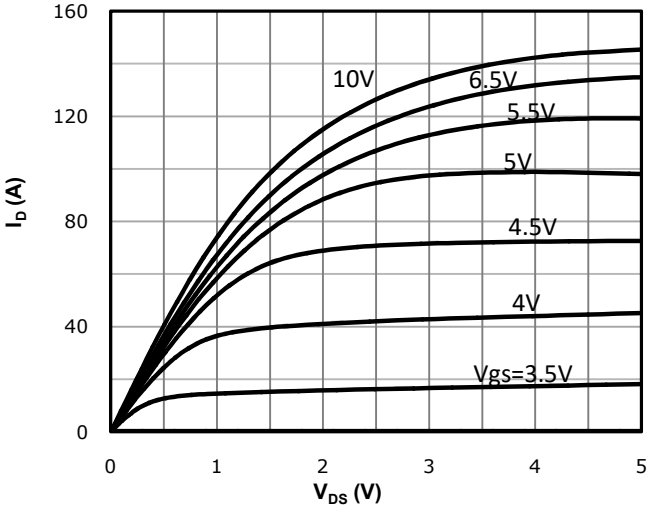


Fig 2: Transfer Characteristics

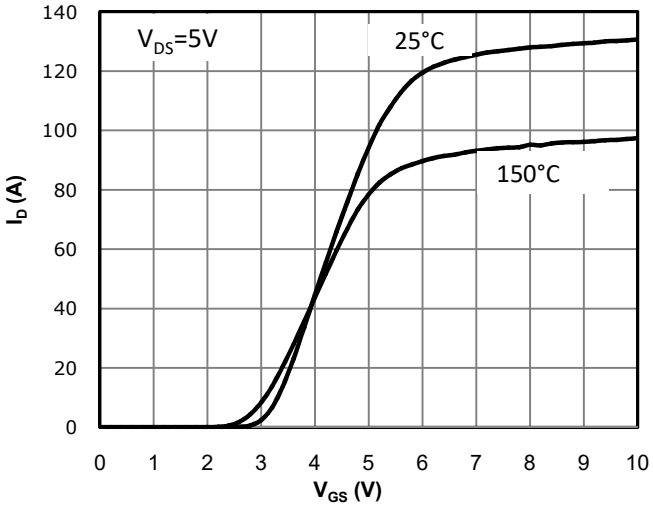


Fig 3: Rds(on) vs Drain Current and Gate Voltage

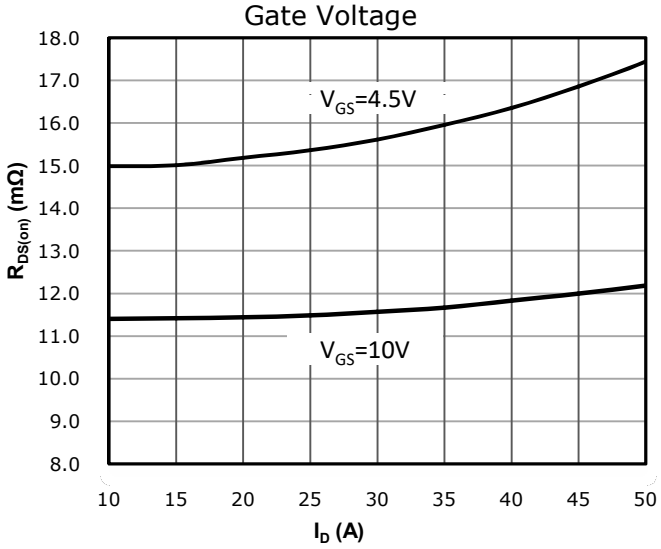


Fig 4: Rds(on) vs Gate Voltage

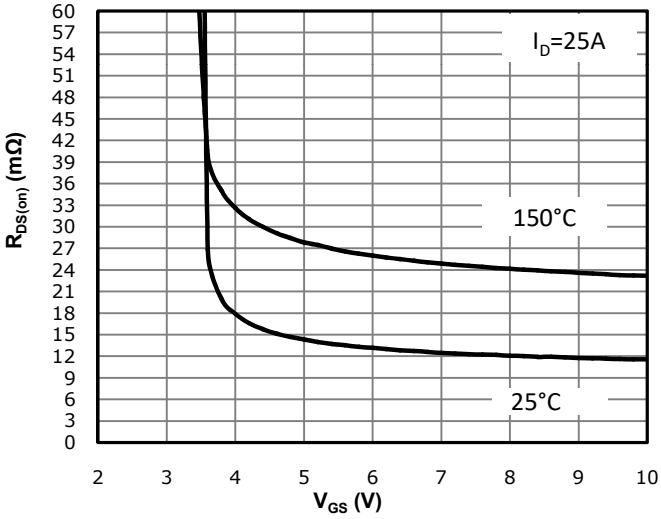


Fig 5: Rds(on) vs. Temperature


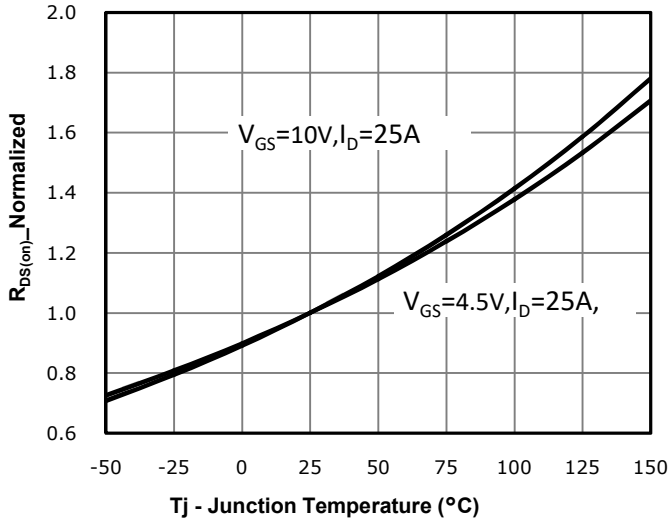


Fig 6: Vgs(th) vs. Temperature

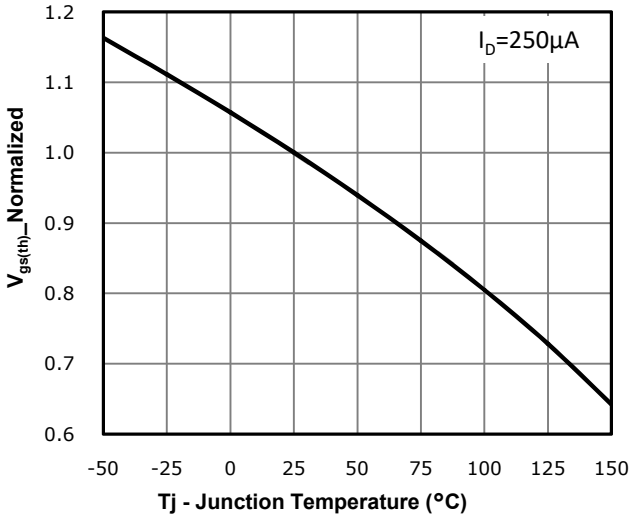

©China Resources Microelectronics (Chongqing) Limited

Fig 7: BVdss vs. Temperature

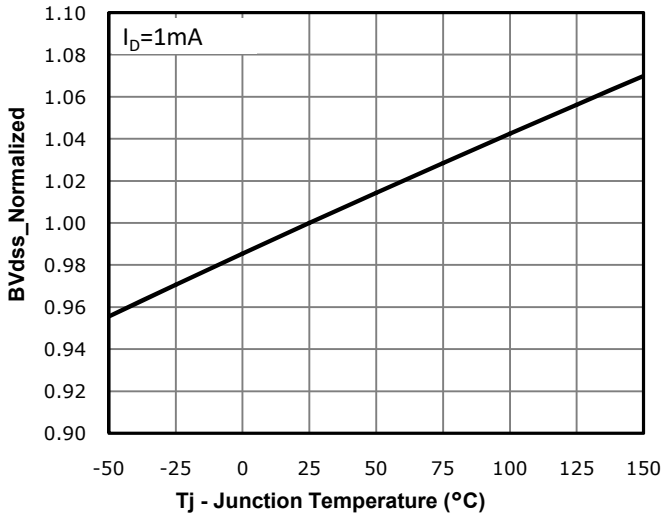


Fig 8: Capacitance Characteristics

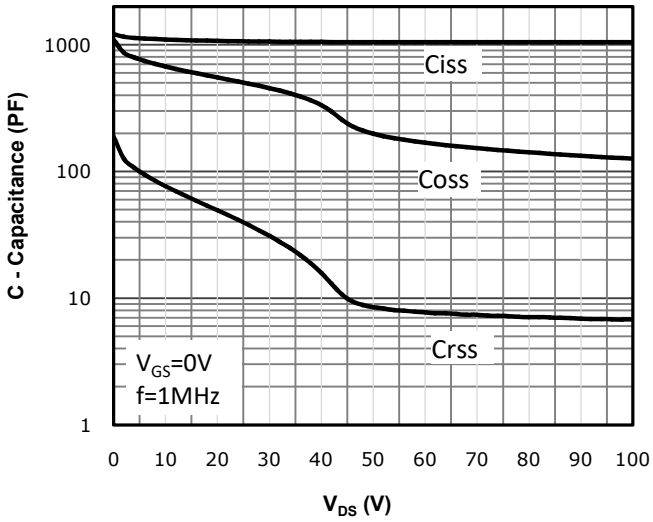


Fig 9: Gate Charge Characteristics

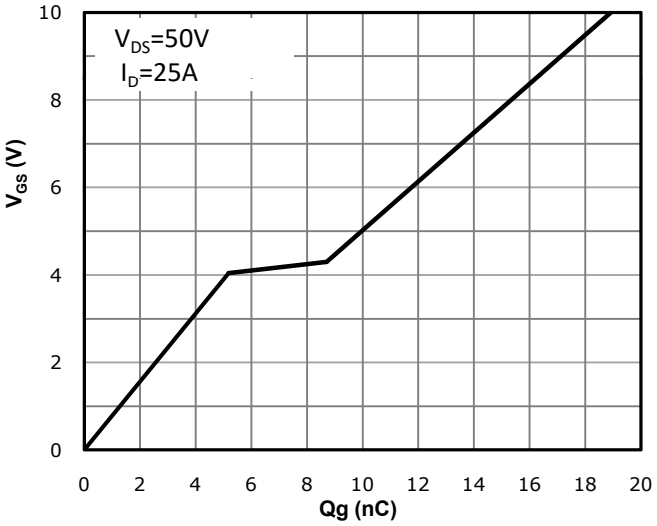


Fig 10: Body-diode Forward Characteristics

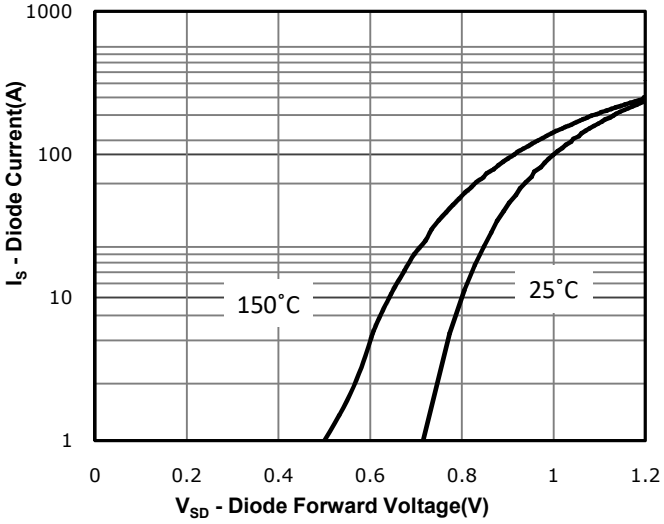


Fig 11: Power Dissipation


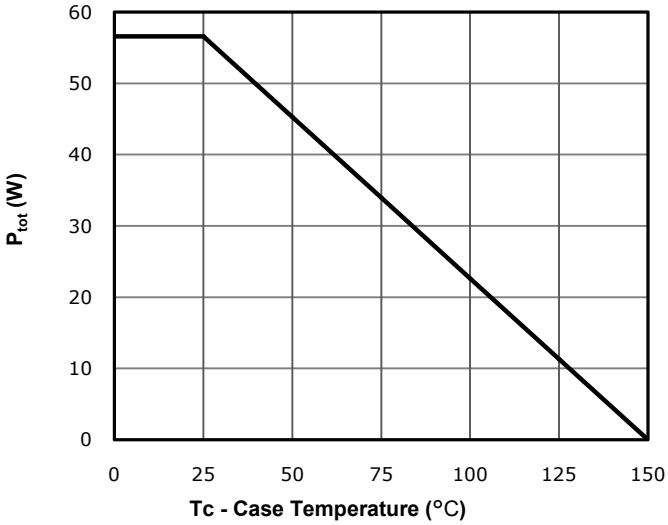


Fig 12: Drain Current Derating

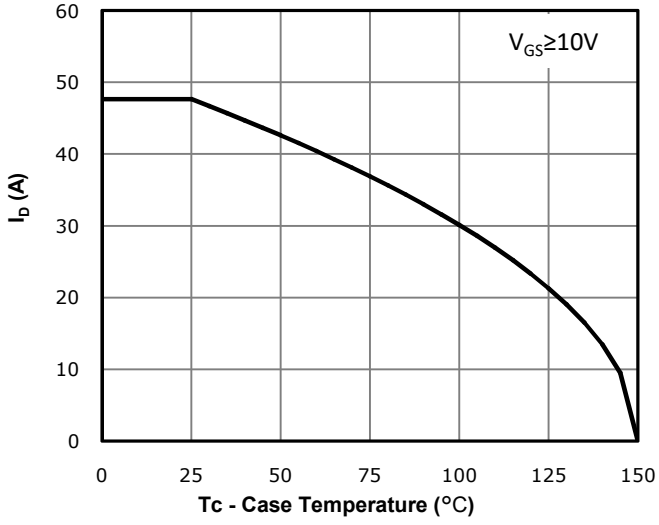

©China Resources Microelectronics (Chongqing) Limited

Fig 13: Safe Operating Area


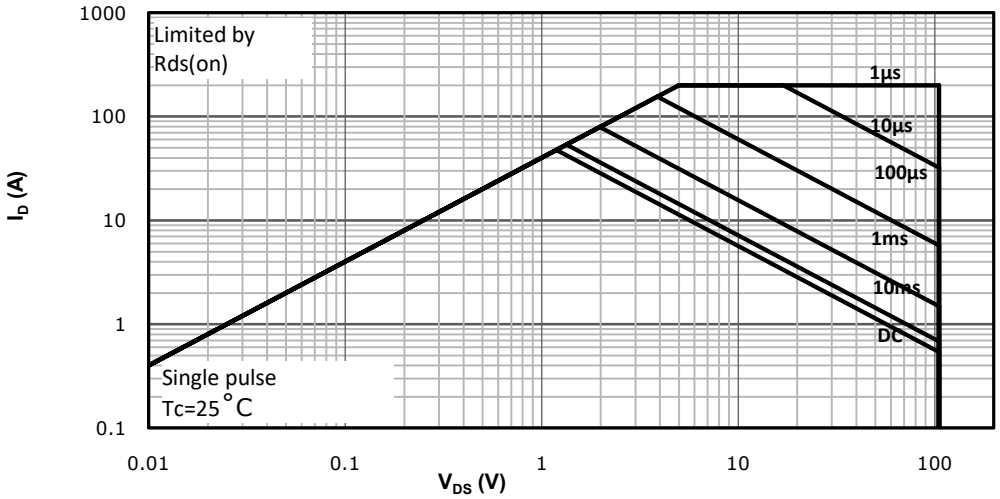



Fig 14: Max. Transient Thermal Impedance

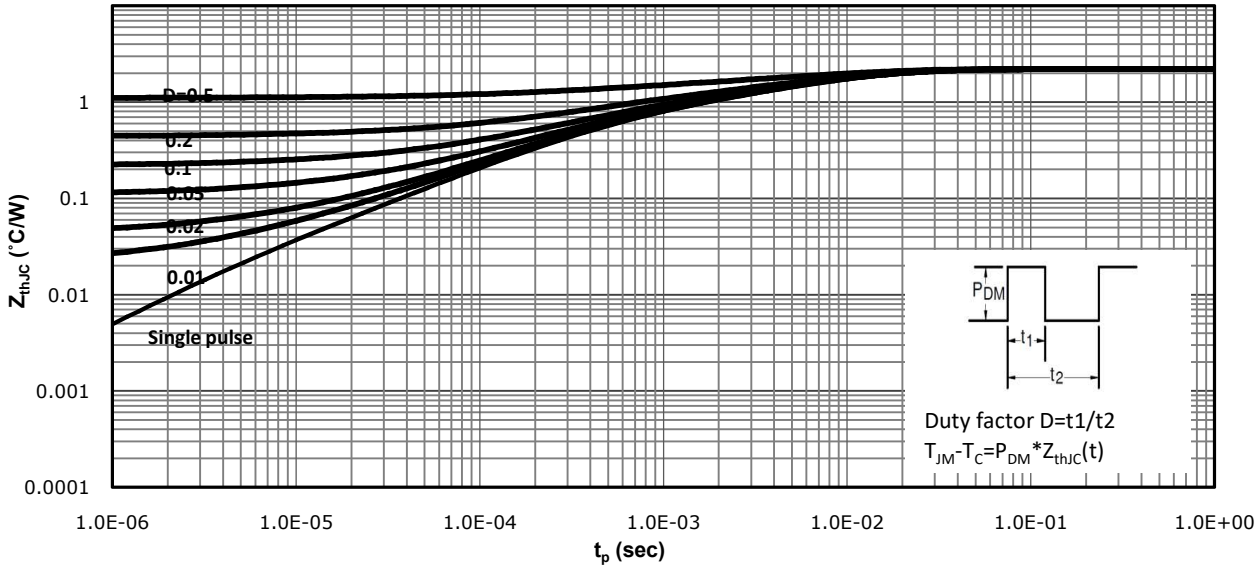


©China Resources Microelectronics (Chongqing) Limited

Test Circuit & Waveform


Gate Charge Test Circuit & Waveform

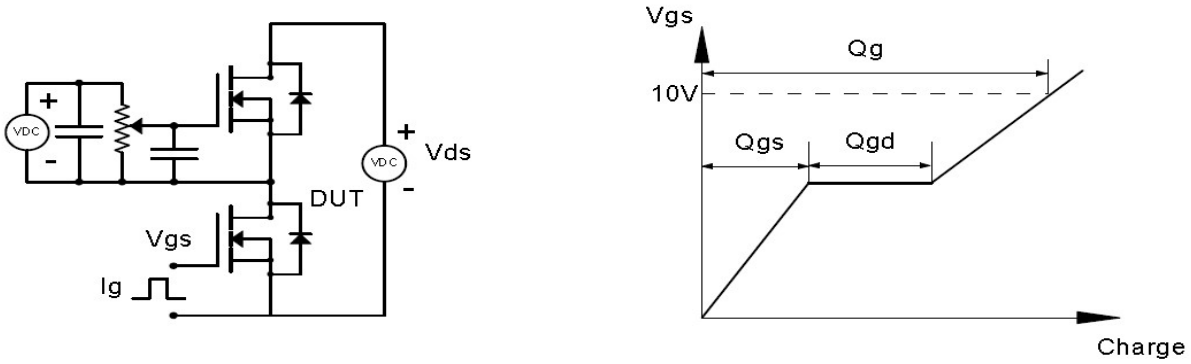


Resistive Switching Test Circuit & Waveforms

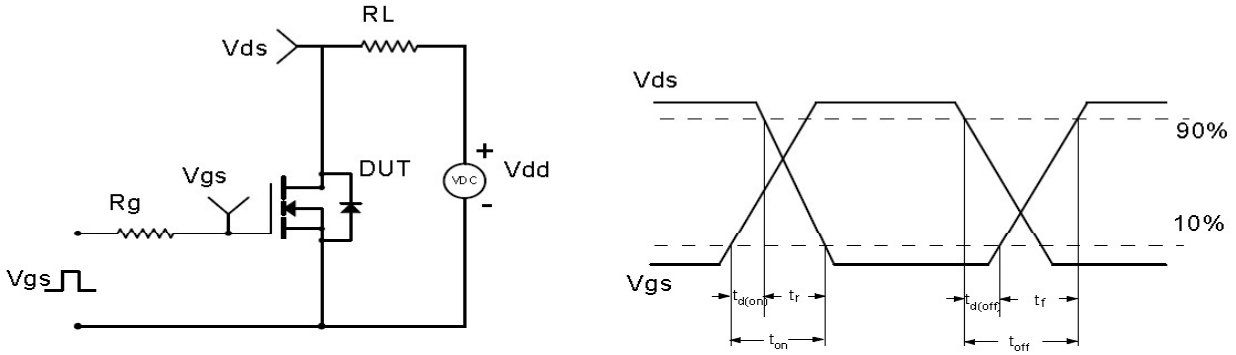

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

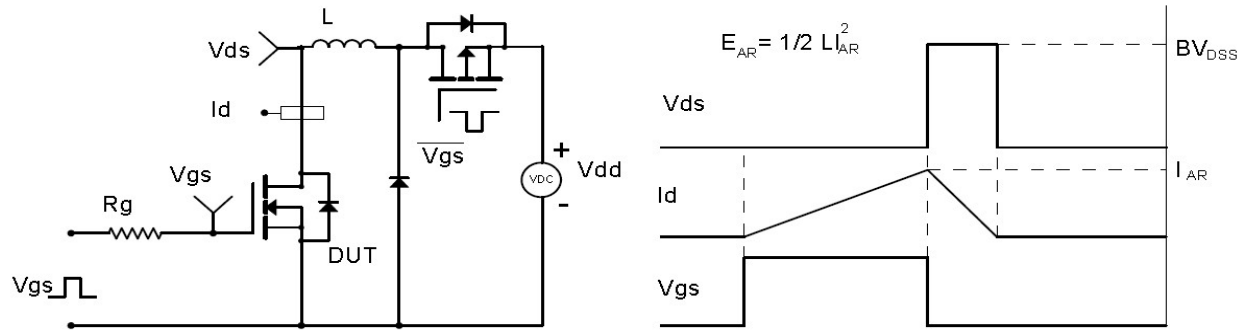


Diode Recovery Test Circuit & Waveforms

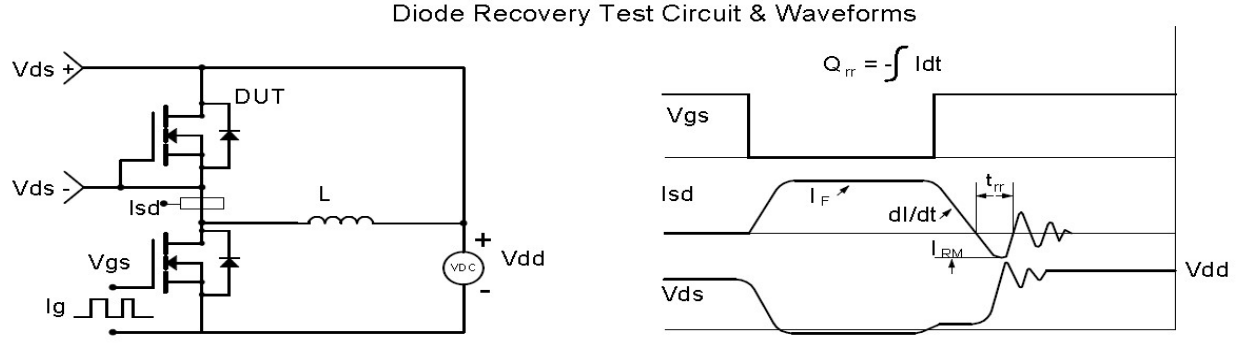

©China Resources Microelectronics (Chongqing) Limited


Package Outline: TO-252

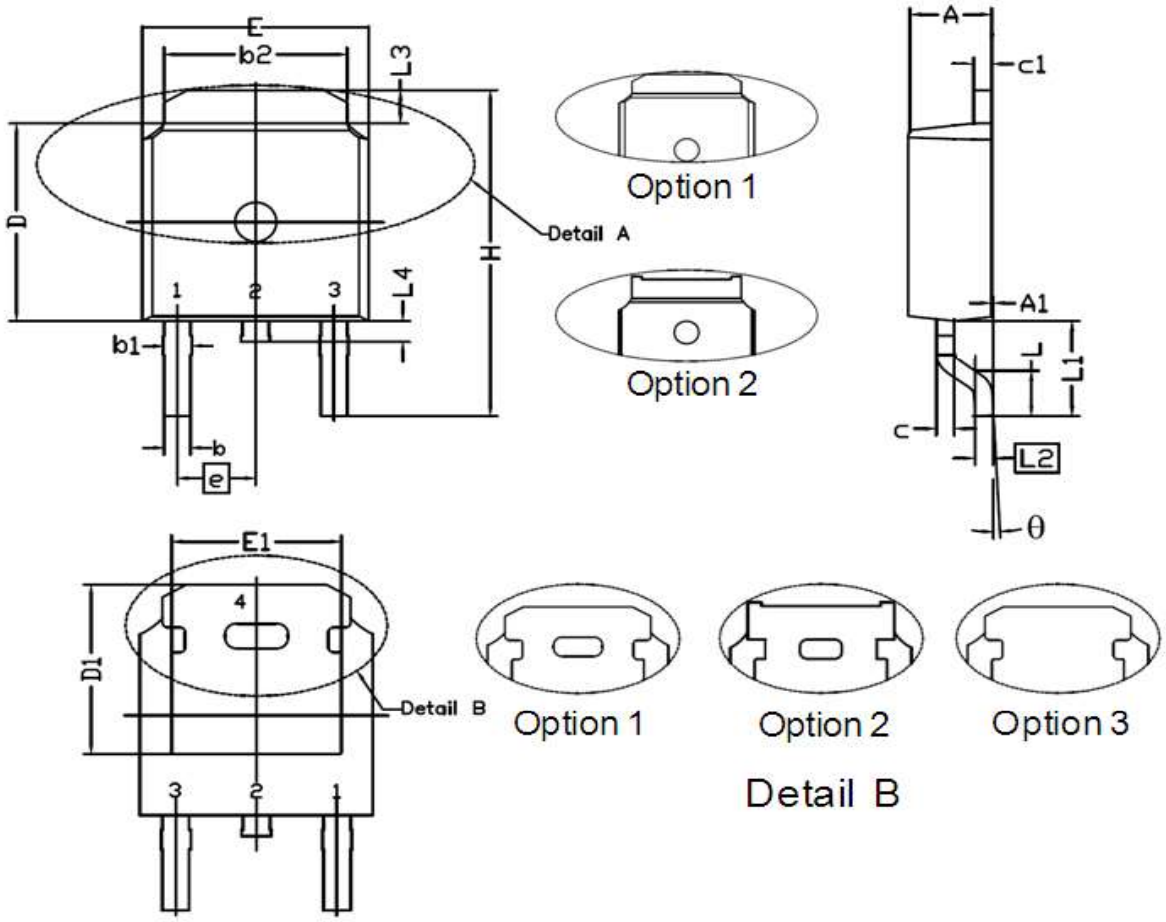

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.15	2.45	0.085	0.096
A1	0.00	0.15	0.000	0.006
b	0.60	0.91	0.024	0.036
b1	0.65	1.15	0.026	0.045
b2	5.00	5.64	0.197	0.222
c	0.45	0.61	0.018	0.024
c1	0.36	0.66	0.014	0.026
D	5.80	6.30	0.228	0.248
D1	5.21	--	0.205	--
e	2.29 BSC.		0.090 BSC.	
E	6.30	6.90	0.248	0.272
E1	4.40	--	0.173	--
H	9.40	10.48	0.370	0.413
L	1.38	1.78	0.054	0.070
L1	2.92 REF		0.115 REF	
L2	0.508 BSC.		0.020 BSC.	
L3	0.72	1.35	0.028	0.053
L4	0.60	1.20	0.024	0.047
θ	0°	10°	0°	10°

©China Resources Microelectronics (Chongqing) Limited

Marking

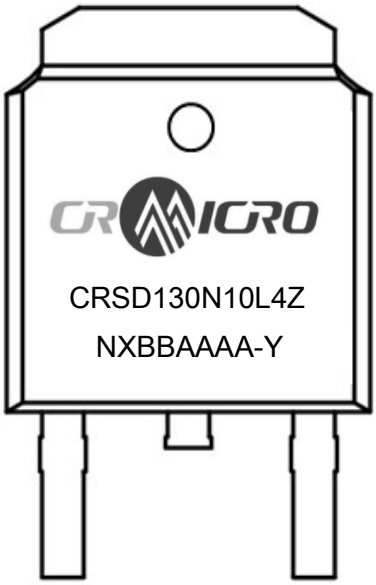

NOTE:
NXBBAAAAY

N	—Wire Bond code
X	—Assembly location code
BB	—Fab code
AAAA	—Lot code
Y	—Bin code

©China Resources Microelectronics (Chongqing) Limited

Revision History

Revision	Date	Major changes
1.0	2024/10/29	Release of Preliminary version.

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semicondutor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.

©China Resources Microelectronics (Chongqing) Limited